
PRODUCT DATA SHEET




Model	Fireplace for wood **«B Max 2»**
Manufacturer	Blist doo Kralja Aleksandra Obrenovića 13 14104 Beloševac, Valjevo


Exploaded view and spare parts

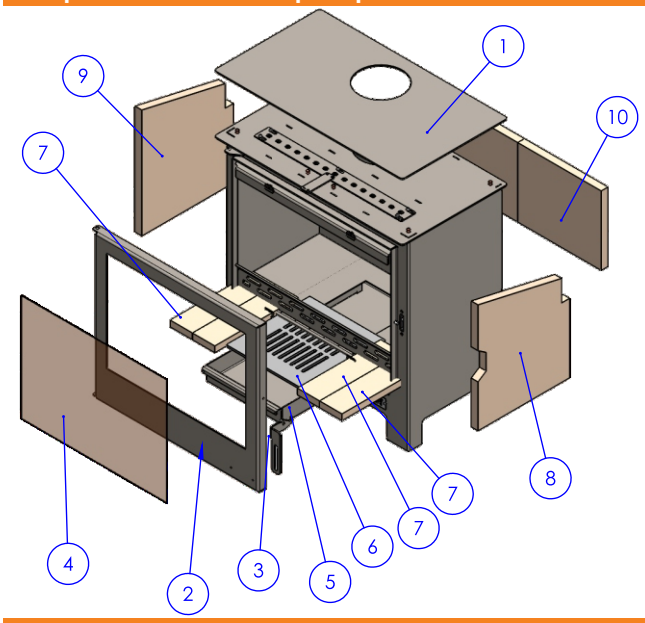

Model			B max 2	
ITEM	NAME	CODE	DIMENSION mm	QUANTTY
1	Top plate	012829	700 x 393 x 4	1
2	Door	012898	608 x 533 x 30	1
3	Steel handle	013034	74 x 135 x 4	1
4	Ceramic glass	012897	540 x 395 x 4	1
5	Ashtray	012853	280 x 348 x 55	1
6	Cast iron grate	012819	280 x 308 x 8	1
7	Vermiculite	021553	166 x 308 x 25	2
8	Vermiculite D	012840	25 x 340 x 404	1
9	Vermiculite L	012820	25 x 340 x 404	1
10	Vermiculite	012843	310 x 255 x 25	2

Dimensions and air regulation

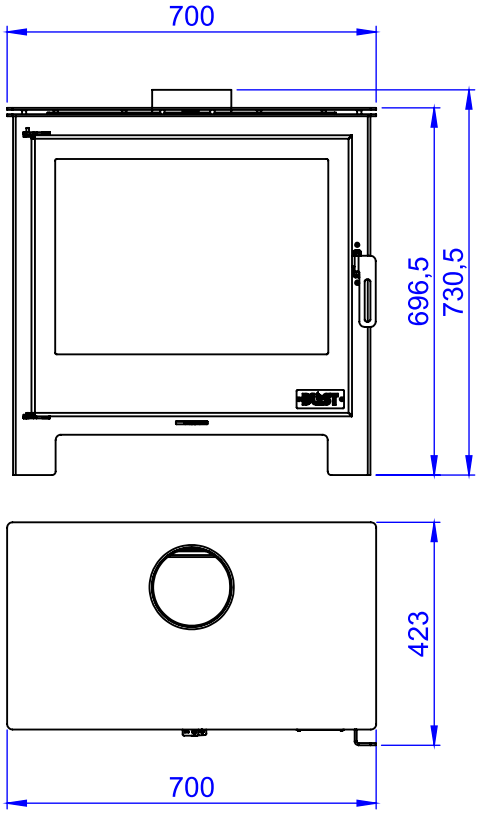


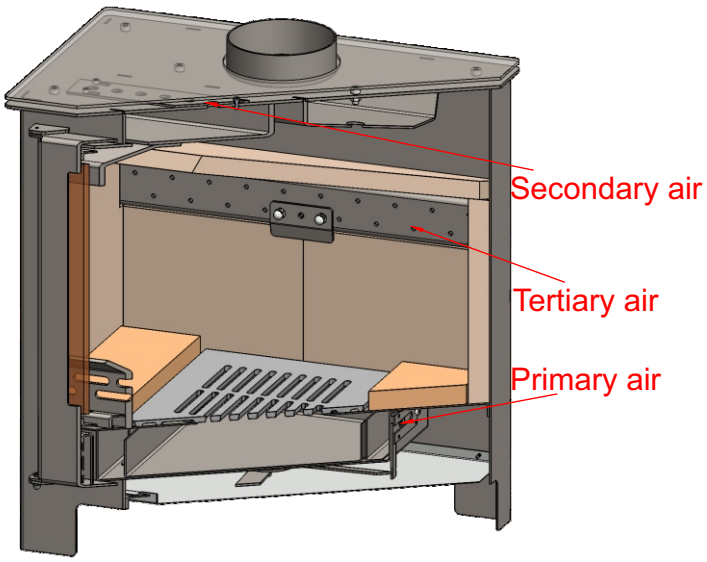

PRODUCT DATA SHEET

Dimensions and weight

Height [mm]	730
Width [mm]	700
Depth [mm]	425
Combustion chamber width [mm]	620
Combustion chamber height [mm]	345
Combustion chamber depth [mm]	310
Flue pipe outlet position, diameter [mm]	top, 150
Net weight [kg]	83
Mass of the test fuel fired hourly [kg/h]	2,90
dR Distance rear [cm]	10
ds1 Distance left [cm]	20
ds2 Distance right [cm]	20
dp Distance front [cm]	110
dL Front side radiation zones [cm]	48
dB Distance bottom (excluting the footing) [cm]	0
dF Distance bottom [cm]	40
dc Distance top [cm]	>75

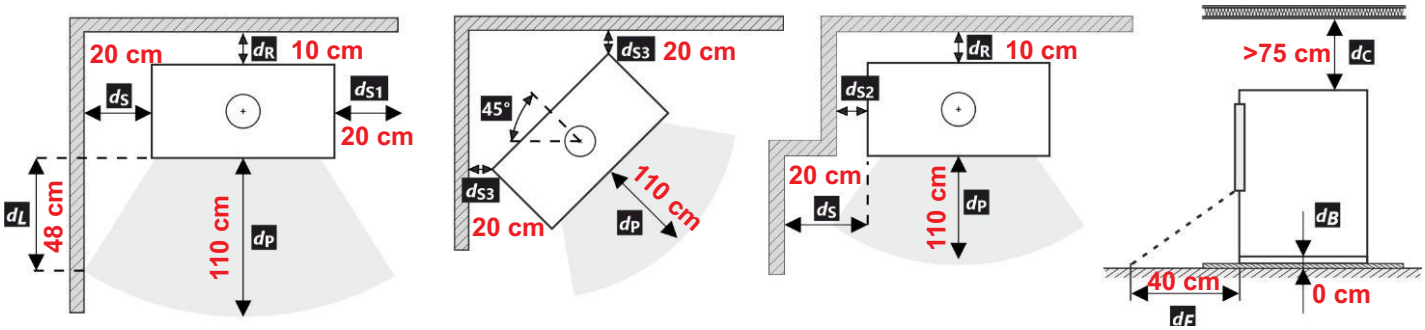

Output

Nominal heat output [kW]	10.2
Maximal heat output [kW]	14.0
Part load heat output [kW]	5.7
Efficiency [%]	81.9
Seasonal efficiency [%]	71.9
Energy efficiency class (Energy efficiency index)	A+ (108,8)

Function

Primary air	Yes, with regulation
Secondary air	Yes, with regulation
Tertiary air	Yes
Ash removal	Ash pan

Data for the chimney sweep

Exhaust gas mass flow [g/s]	7.6
Flue gas temperature [°C]	313
Minimum flue draught [Pa]	12

Meets standards

EN 16510-2-1:2022	✓
Eco design	✓
BImSchv stufe 2	✓
Flamme Verte (French)	✓
4 Stelle (Italian)	✓