
PRODUCT DATA SHEET



Model — Fireplace for wood **«B2 E 4.0»**


Manufacturer — Blist doo
Kralja Aleksandra Obrenovića 13
14104 Beloševac, Valjevo


Exploded view and spare parts

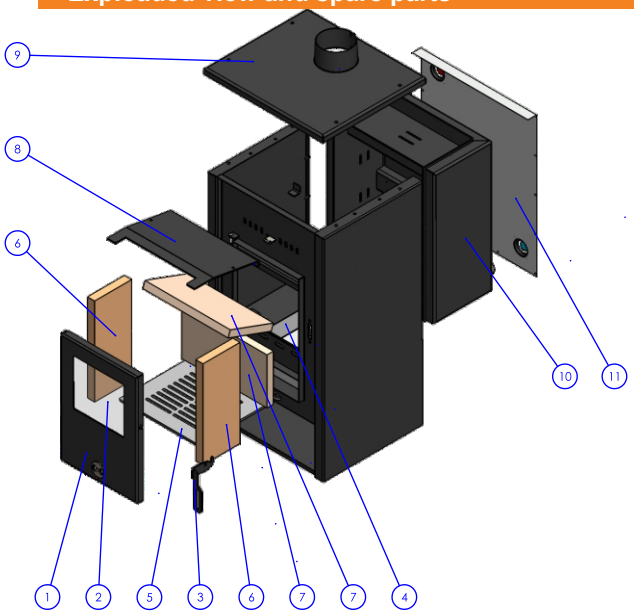


ITEM	NAME	CODE	DIMENSION mm	QUANTITY
1	Door	019144	25x300x430	1
2	Ceramic glass	K00251	4x200x220	1
3	Steel handle	018456	4x74x135	1
4	Ashtray	020250	60x245x300	1
5	Cast iron grate	K00122	8x280x308	1
6	Fireclay brick B1	K00102	28x145x343	2
7	Vermiculite	019341	25x180x335	2
8	Upper chamber	019342	4x256x343	1
9	Top plate	019351	23x406x467	1
10	Boiler	019330	236x427x524	1
11	Back plate	019345	1x454x550	1

Dimensions and air regulation

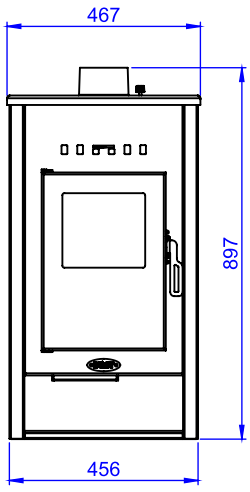




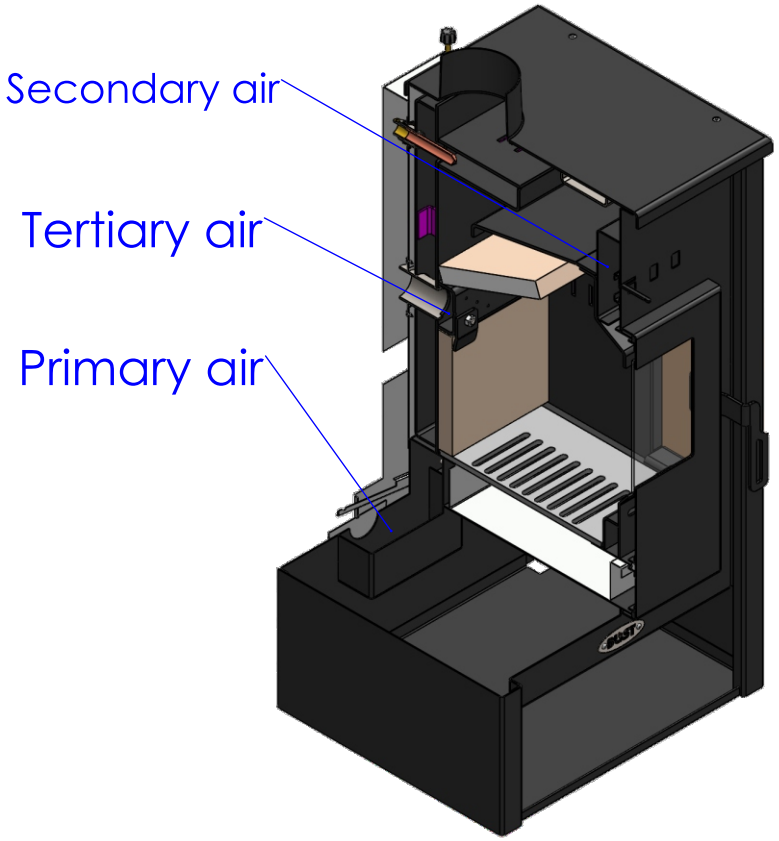

PRODUCT DATA SHEET

Dimensions and weight

Height [mm]	900
Width [mm]	465
Depth [mm]	465
Combustion chamber width [mm]	350
Combustion chamber height [mm]	340
Combustion chamber depth [mm]	320
Flue pipe outlet position, diameter [mm]	top, 120
Net weight [kg]	86
Mass of the test fuel fired hourly [kg/h]	2,4
dR Distance rear [cm]	30
ds1 Distance left [cm]	30
ds2 Distance right [cm]	30
dp Distance front [cm]	100
dL Front side radiation zones [cm]	30
dB Distance bottom (excluting the footing) [cm]	10
dF Distance bottom [cm]	14
dc Distance top [cm]	>75

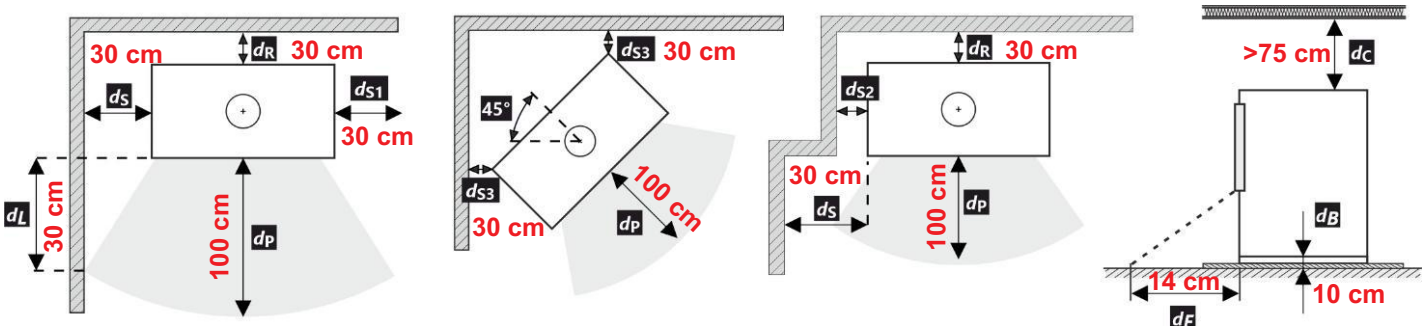

Output

Nominal heat output [kW]	9.0 [Radiant 4.9 + Water 4.1]
Maximal heat output [kW]	14.0 [Radiant 6.0 + Water 8.0]
Part load heat output [kW]	/
Efficiency [%]	87.1
Seasonal efficiency [%]	77.1
Energy efficiency class (Energy efficiency index)	A+ (116,3)

Function

Primary air	Yes, with regulation
Secondary air	Yes, with regulation
Tertiary air	Yes
Ash removal	Ash pan

Data for the chimney sweep

Exhaust gas mass flow [g/s]	7,9
Flue gas temperature [°C]	206
Minimum flue draught [Pa]	12

Meets standards

EN 16510-2-1:2022	✓
Eco design	✓
BImSchv stufe 2	✓
4 Stelle (Italian)	✓