
PRODUCT DATA SHEET




Model	Fireplace for wood **«B Max E 3.0»**
Manufacturer	Blist doo Kralja Aleksandra Obrenovića 13 14104 Beloševac, Valjevo


Exploded view and spare parts

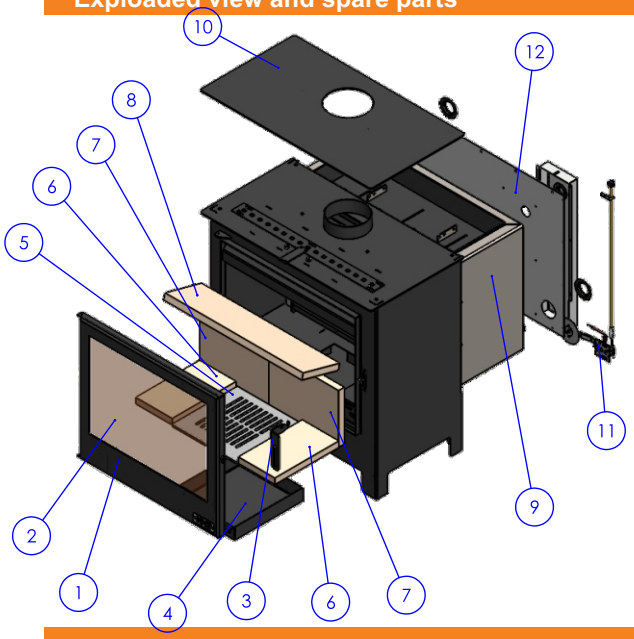


ITEM	NAME	CODE	DIMENSION (mm)	QUANTITY
1	Door	018683	30x533x608	1
2	Ceramic glass	K00253	4x395x540	1
3	Steel handle	019104	4x74x135	1
4	Ashtray	019139	55x245x300	1
5	Cast iron grate	K00122	8x280x308	1
6	Vermiculite	019022	25x160x280	2
7	Vermiculite	019016	25x215x304	2
8	Vermiculite	019018	25x165x605	1
9	Boiler	018606	488x363x698	1
10	Top plate	018633	4x415x750	1
11	Automatic controller	K00216	/	1
12	Back plate	019089	30x455x614	1

Dimensions and air regulation

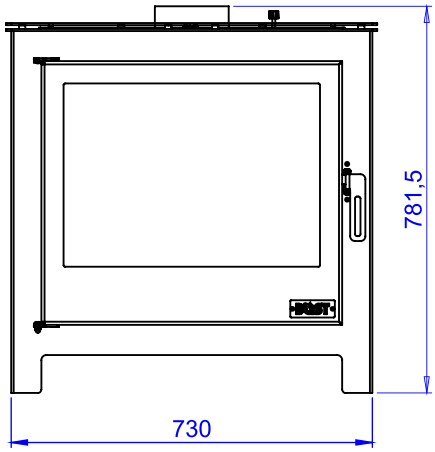

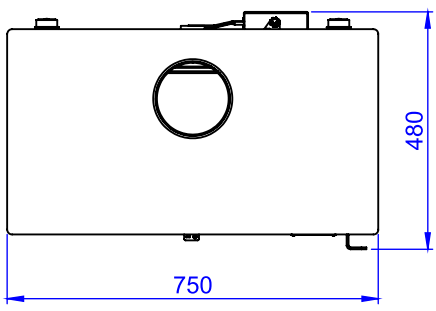


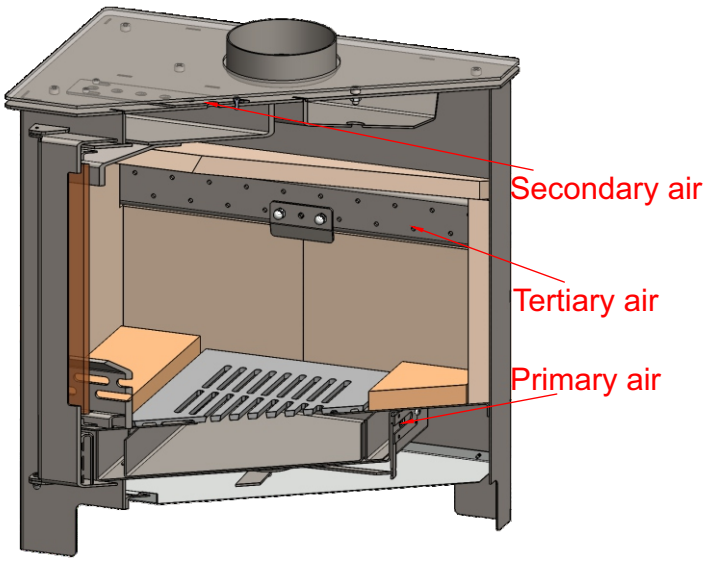

PRODUCT DATA SHEET

Dimensions and weight

Height [mm]	780
Width [mm]	750
Depth [mm]	465
Combustion chamber width [mm]	610
Combustion chamber height [mm]	360
Combustion chamber depth [mm]	310
Flue pipe outlet position, diameter [mm]	top, 150
Net weight [kg]	134
Mass of the test fuel fired hourly [kg/h]	3,82
dR Distance rear [cm]	10
ds1 Distance left [cm]	20
ds2 Distance right [cm]	20
dp Distance front [cm]	110
dL Front side radiation zones [cm]	48
dB Distance bottom (excluting the footing) [cm]	0
dF Distance bottom [cm]	40
dc Distance top [cm]	>75

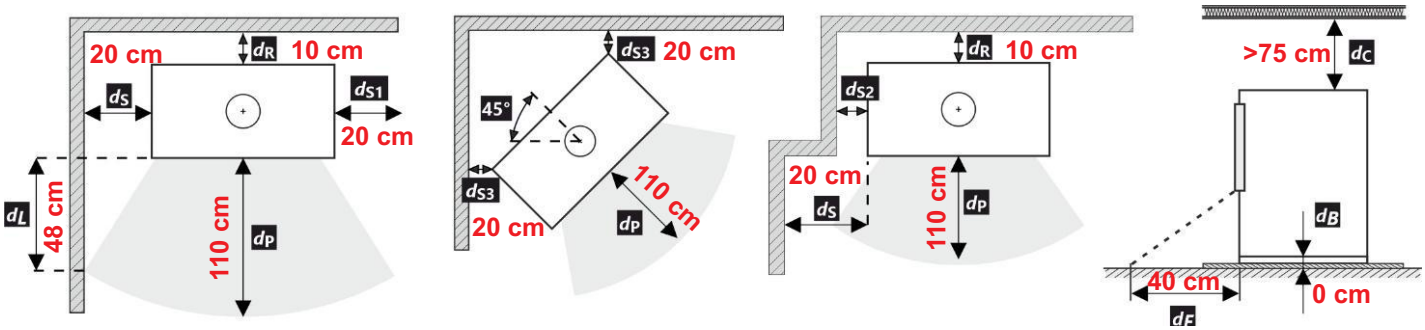

Output

Nominal heat output [kW]	12.8 [Radiant 6.9 + Water 5.9]
Maximal heat output [kW]	24.0 [Radiant 9.0 + Water 15.0]
Part load heat output [kW]	/
Efficiency [%]	78.7
Seasonal efficiency [%]	68.7
Energy efficiency class (Energy efficiency index)	A (100,2)

Function

Primary air	Yes, with regulation
Secondary air	Yes, with regulation
Tertiary air	Yes
Ash removal	Ash pan

Data for the chimney sweep

Exhaust gas mass flow [g/s]	16.6
Flue gas temperature [°C]	257
Minimum flue draught [Pa]	13

Meets standards

EN 16510-2-1:2022	✓
Eco design	✓
BImSchv stufe 2	✓
4 Stelle (Italian)	✓