
PRODUCT DATA SHEET




Model	Cooker fired by wood **«OLIMP 12»**
Version	**Olimp 12 L / L Ceramic, Olimp 12 R / R Ceramic**
Manufacturer	Blist doo Kralja Aleksandra Obrenovića 13 14104 Beloševac, Valjevo


Exploded view and spare parts

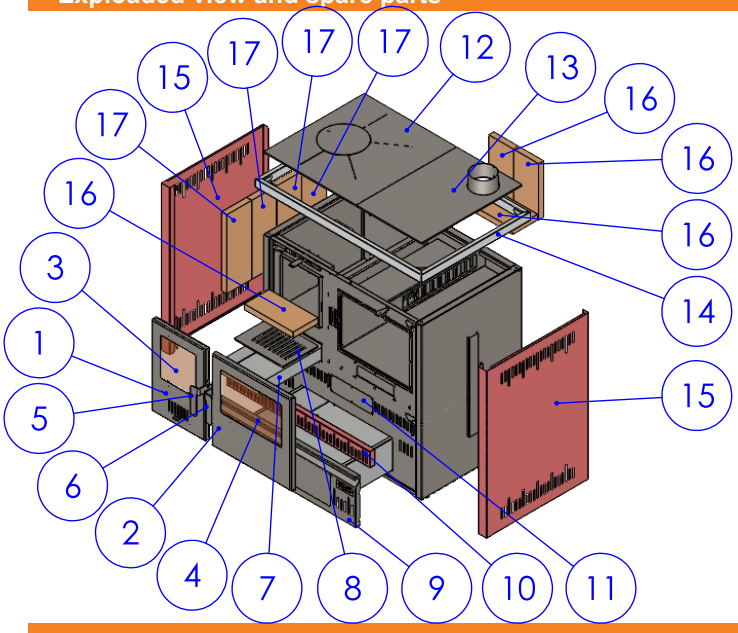


ITEM	NAME	CODE	DIMENSION mm	QUANTITY
1	Door	014913	25x290x430	1
2	Door	014951	25x430x430	1
3	Glass	014919	4x210x220	1
4	Glass	014952	4x220x350	1
5	Steel handle L	014921	4x74x135	1
6	Steel handle R	014910	4x74x135	1
7	Ashtray	014948	60x215x366	1
8	Steel grate	014933	6x194x265	1
9	Drawer	014902	150x495x500	1
10	Front mask	014901	27x77x775	1
11	Audit	014922	2x78x228	1
12	Big top plate	014938	6x500x545	1
13	Small top plate	014945	6x353x545	1
14	Frame	014935	40x590x900	1
15	Side page	014909	61x553x782	2
16	Fireclay brick B2 Kr	014932	28x135x265	4
17	Fireclay brick B2	014886	28x135x370	4

Dimensions and air regulation

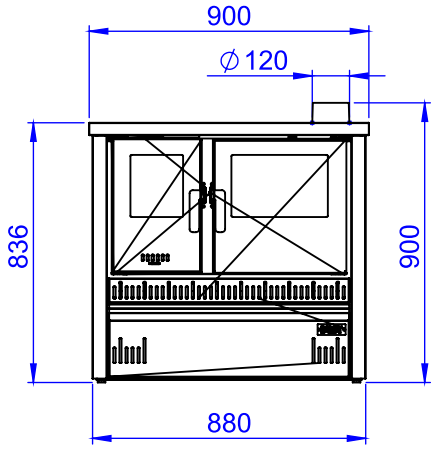

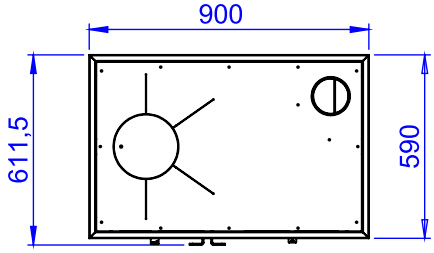


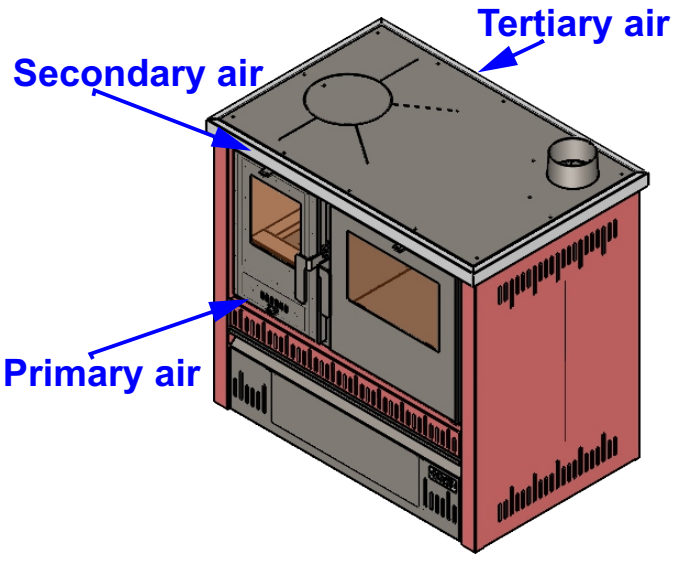

PRODUCT DATA SHEET

Dimensions and weight

Height [mm]	900
Width [mm]	900
Depth [mm]	610
Combustion chamber width [mm]	270
Combustion chamber height [mm]	300
Combustion chamber depth [mm]	470
Flue pipe outlet, diameter [mm]	120
Net weight [kg]	115
Mass of the test fuel fired hourly [kg/h]	3,41
dR Distance rear [cm]	40
ds1 Distance left [cm]	80
ds2 Distance right [cm]	80
dp Distance front [cm]	100
dL Front side radiation zones [cm]	/
dB Distance bottom (excluting the footing) [cm]	0
dF Distance bottom [cm]	/
dc Distance top [cm]	>75

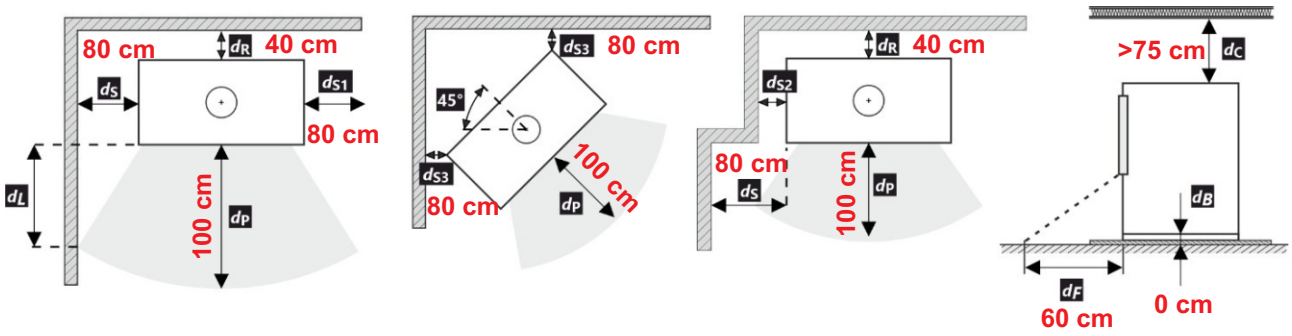

Output

Nominal heat output [kW]	12.5
Maximal heat output [kW]	15.0
Efficiency [%]	81.0
Seasonal efficiency [%]	71.0
Energy efficiency class (Energy efficiency index)	A+ (108)

Function

Primary air	Yes, with regulation
Secondary air	Yes, with regulation
Tertiary air	Yes
Ash removal	Ash pan

Data for the chimney sweep

Exhaust gas mass flow [g/s]	15.0
Flue gas temperature [°C]	247,7
Minimum flue draught [Pa]	12

Meets standards

ČSN EN 16510-1 ed. 2:2024; ČSN EN 16510-2-3:2025	✓
Eco design	✓
BImSchv stufe 2	✓
4 Stelle (Italian)	✓