
PRODUCT DATA SHEET

Model	Fireplace for wood **«B Max 1»**
Manufacturer	Blist doo Kralja Aleksandra Obrenovića 13 14104 Beloševac, Valjevo





Exploded view and spare parts

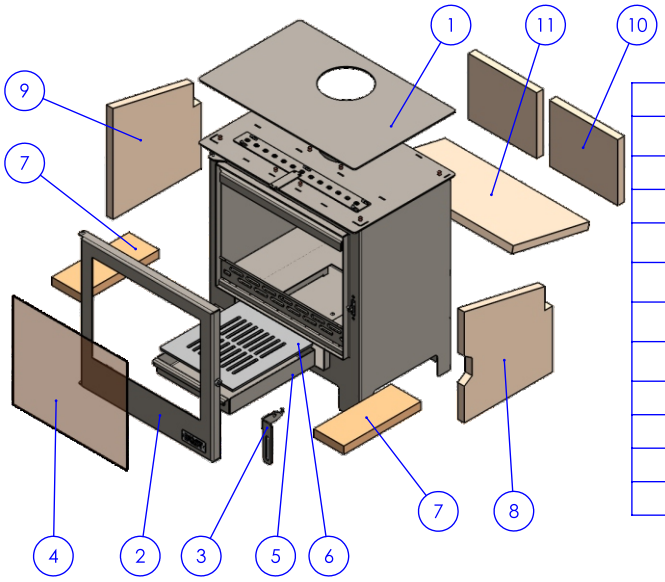

ITEM	NAME	CODE	DIMENSION MM	QUANTITY
1	Top plate	013464	604x393x4	1
2	Door	013445	508x498x30	1
3	Steel handle	013428	74x135x4	1
4	Ceramic glass	013450	440x360x4	1
5	Ashtray	013461	280x330x55	1
6	Cast iron grate	013488	280x308x8	1
7	Fireclay brick E2	013455	115x297x28	2
8	Vermiculite D	013429	375x340x25	1
9	Vermiculite L	013584	375x340x25	1
10	Vermiculite	013481	262x198x25	2
11	Vermiculite	013470	555x300x25	1

Dimensions and air regulation

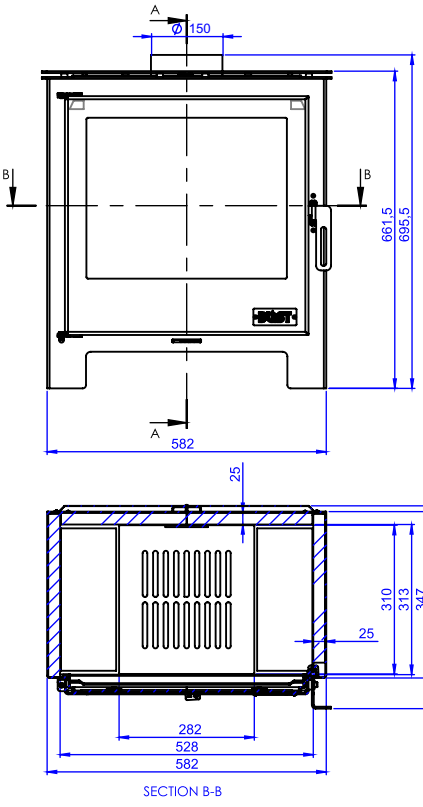


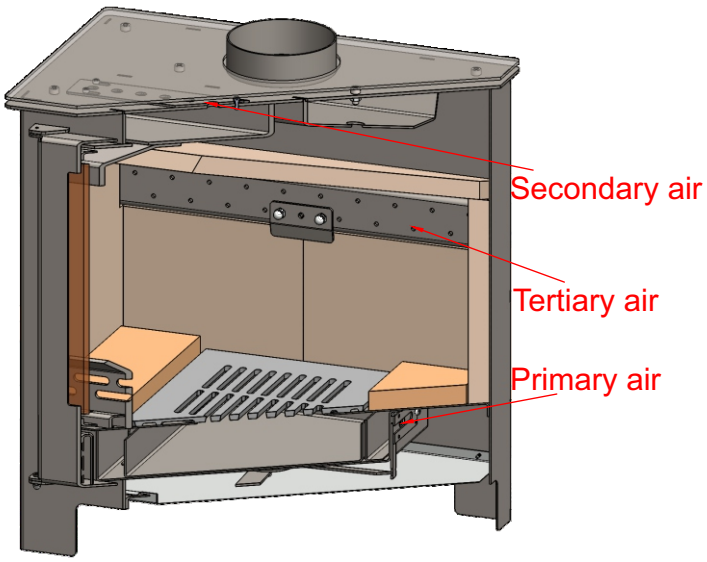

PRODUCT DATA SHEET

Dimensions and weight

Height [mm]	695
Width [mm]	605
Depth [mm]	425
Combustion chamber width [mm]	525
Combustion chamber height [mm]	270
Combustion chamber depth [mm]	300
Flue pipe outlet position, diameter [mm]	top, 150
Net weight [kg]	75
Mass of the test fuel fired hourly [kg/h]	2,53
dR Distance rear [cm]	30
ds1 Distance left [cm]	35
ds2 Distance right [cm]	35
dp Distance front [cm]	75
dL Front side radiation zones [cm]	30
dB Distance bottom (excluting the footing) [cm]	0
dF Distance bottom [cm]	30
dc Distance top [cm]	--

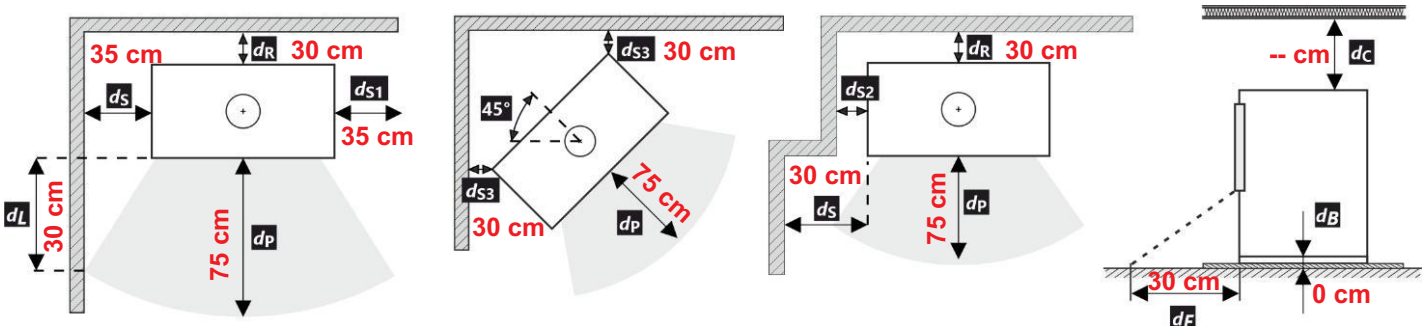

Output

Nominal heat output [kW]	9
Maximal heat output [kW]	12
Part load heat output [kW]	4.9
Efficiency [%]	81.1
Seasonal efficiency [%]	72.1
Energy efficiency class (Energy efficiency index)	A+ (109)

Function

Primary air	Yes, with regulation
Secondary air	Yes, with regulation
Tertiary air	Yes
Ash removal	Ash pan

Data for the chimney sweep

Exhaust gas mass flow [g/s]	7.6
Flue gas temperature [°C]	317
Minimum flue draught [Pa]	12

Meets standards

EN 16510-2-1:2022	✓
Eco design	✓
BImSchv stufe 2	✓
Flamme Verte (French)	✓
4 Stelle (Italian)	✓