
PRODUCT DATA SHEET



Model — Solid fuel stoves **«Napoli 5.0»**


Manufacturer — Blist doo
Kralja Aleksandra Obrenovića 13
14104 Beloševac, Valjevo


Exploded view and spare parts

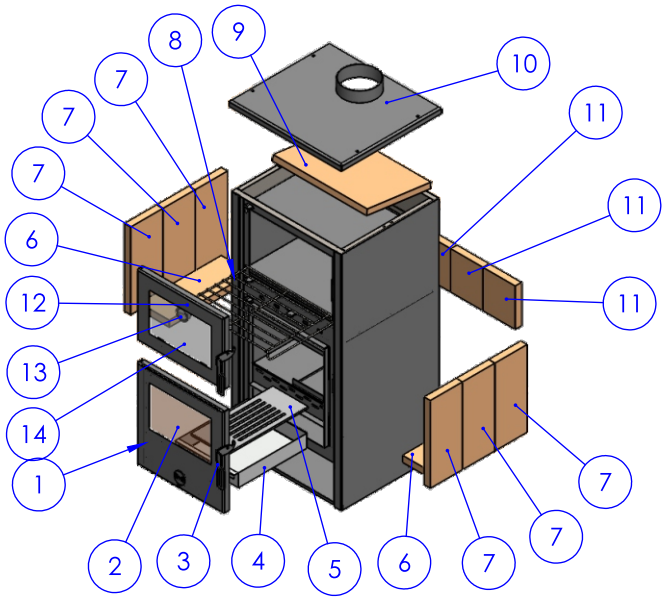


ITEM	NAME	CODE	DIMENSION mm	QUANTITY
1	Door	018377	2x390x400	1
2	Ceramic glass	K00240	4x200x300	1
3	Steel handle	018456	4x74x135	2
4	Ashtray	018506	60x270x330	1
5	Cast iron grate	K00120	8x160x370	1
6	Fireclay brick B2	K00103	28x135x370	2
7	Fireclay brick B1	K00102	28x145x343	6
8	Oven rack	K00246	290x415	1
9	Vermiculite	018427	25x290x425	1
10	Top plate	018431	3x454x508	1
11	Fireclay brick B1 Kr	018382	28x145x170	3
12	Door	018421	2x390x280	1
13	Thermostat	K00247	/	1
14	Tempered glass	K00249	4x190x300	1

Dimensions and air regulation

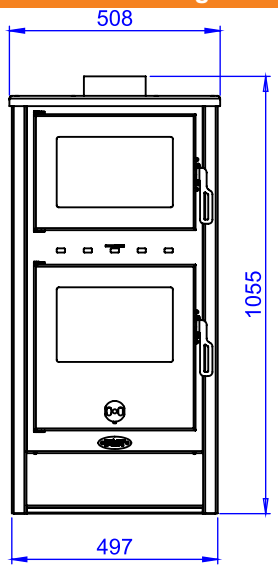




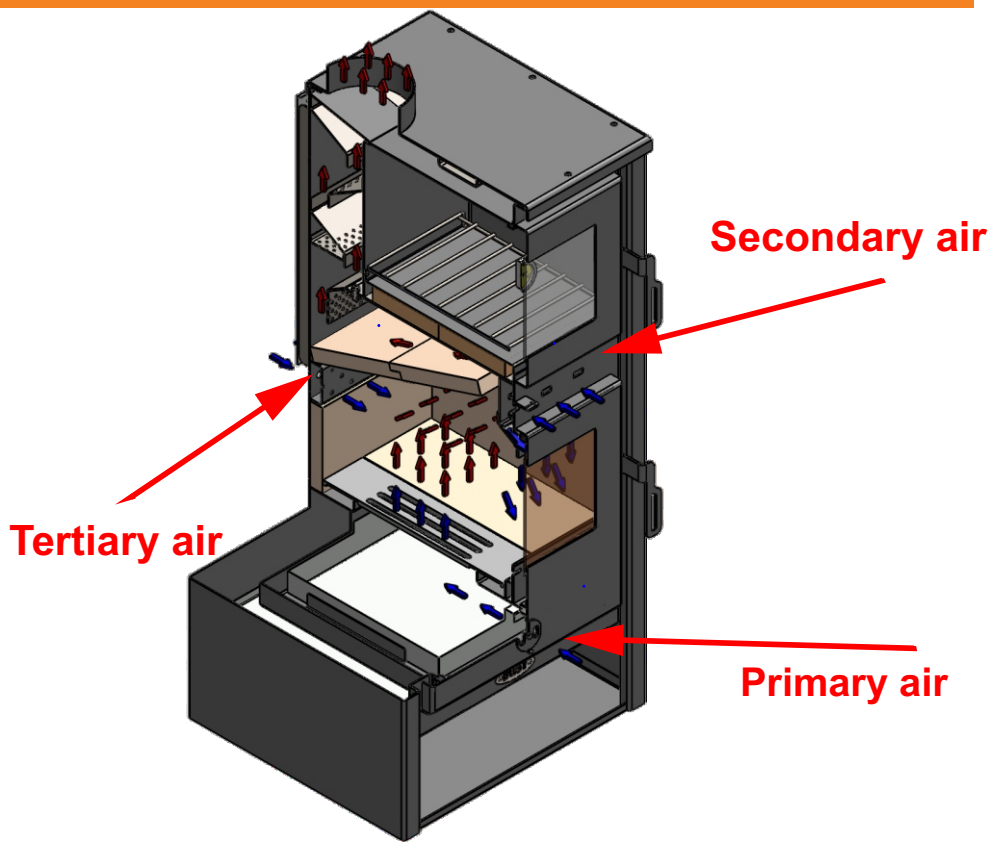

PRODUCT DATA SHEET

Dimensions and weight

Height [mm]	1070
Width [mm]	510
Depth [mm]	490
Combustion chamber width [mm]	440
Combustion chamber height [mm]	300
Combustion chamber depth [mm]	390
Oven width [mm]	430
Oven height [mm]	240
Oven depth [mm]	300
Flue pipe outlet position, diameter [mm]	top, 150
Net weight [kg]	89
Mass of the test fuel fired hourly [kg/h]	2,16
dR Distance rear [cm]	35
ds1 Distance left [cm]	45
ds2 Distance right [cm]	45
dp Distance front [cm]	750
dL Front side radiation zones [cm]	30
dB Distance bottom (excluting the footing) [cm]	0
dF Distance bottom [cm]	35
dc Distance top [cm]	> 75

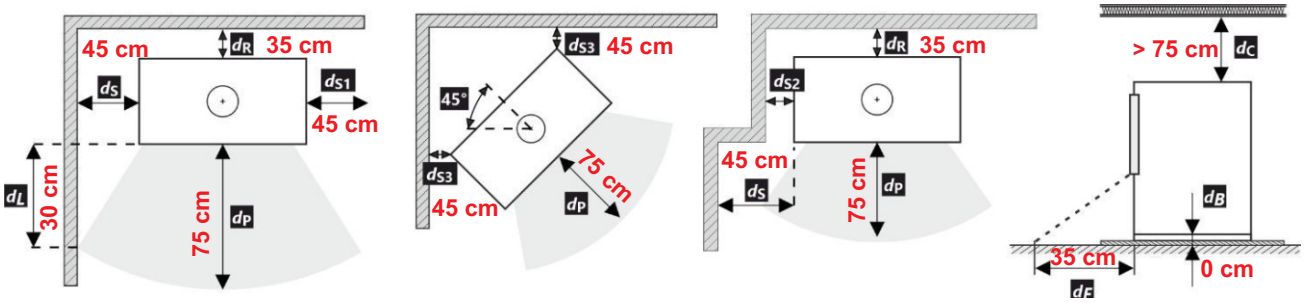

Output

Nominal heat output [kW]	8.3
Maximal heat output [kW]	11.0
Part load heat output [kW]	8.3
Efficiency [%]	87.7
Seasonal efficiency [%]	67.7
Energy efficiency class (Energy efficiency index)	A+ (117)

Function

Primary air	Yes, with regulation
Secondary air	Yes, with regulation
Tertiary air	Yes
Ash removal	Ash pan

Data for the chimney sweep

Exhaust gas mass flow [g/s]	6.15
Flue gas temperature [°C]	217
Minimum flue draught [Pa]	12

Meets standards

EN 16510-2-1:2022	✓
Eco design	✓
BImSchv stufe 2	✓
Certificazione ambientale - 5 Stelle (Italian)	✓
Flamme verte	✓